


2-Channel Thermocouple Module

The analog input terminals allow thermocouples to be connected directly. The Bus Terminal's circuitry can operate thermocouple sensors using the 2-wire technique. Linearisation over the full temperature range is realized with the aid of a microprocessor. The temperature range can be selected freely. The error LEDs indicate a broken wire. Compensation for the cold junction is made through an internal temperature measurement at the terminals. Can also be used for mV measurement.

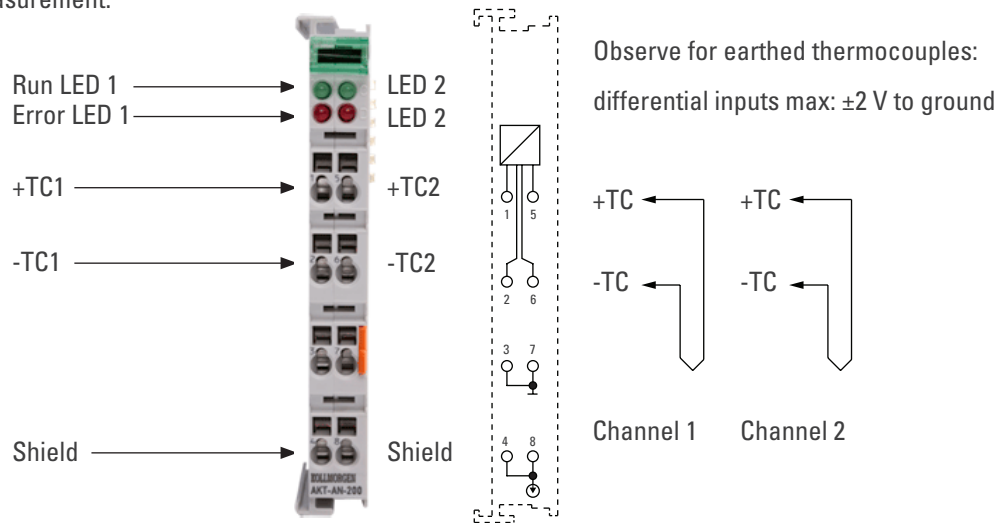

Electrical and Mechanical Specification	AKT-AN-200-000
Number of inputs	2
Power supply	Via the standard-bus
Thermocouple sensor types	Types J, K, L, B, E, N, R, S, T, U (default setting type K), mV measurement
Connection Method	2-wire
Temperature range	In the range defined in each case for the sensor (default setting: type K; -100...+1,370 °C)
Resolution	0.1 °C per digit
Conversion time	~ 250 ms
Wiring fail indication	Yes
Measuring error	< ± 0.5 % (relative to full scale value)
Electrical isolation	500 V _{rms} (standard-bus / signal voltage)
Current consumption standard-bus	Typ. 65 mA
Bit width in the process image	Input: 2 x 16 bit data (2 x 8 bit control/status optional)
Configuration	No address setting, configuration via Bus Coupler or controller
Weight	70 g
Operating/storage temperature	0 ... +55 °C / -25 °C... +85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	Conforms to EN 60068-2-6 / EN 60068-2-27/ 29
EMC immunity/emission	Conforms to EN 61000-6-2 / EN 61000-6-4
Protect. class/installation pos.	IP 20 / variable

203A West Rock Road • Radford, VA 24141 USA • Phone: 1-540-633-3545