

**Instruction Manual: Wall/Panel Mounting Bracket  
for the UBC10 unit**

**Bedienungsanleitung: Wandmontageadapter für  
UBC10 Gerät**

**PULS**

**ZM1.UBC10**


**Bracket for Wall Mounting**

This accessory is used to mount the DC-UPS UBC10 units on a wall or on a panel without using a DIN-Rail.

The bracket can be directly mounted without removing the aluminium brackets and the black plastic slide of the DC-UPS. The total installation depth will increase to 126mm.

**Wandmontagewinkel**

Dieses Zubehörteil kann verwendet werden um die DC-USV UBC10 ohne DIN-Schiene an eine flache Wand zu montieren. Der Montagewinkel kann direkt auf die DC-USV montiert werden ohne die DIN-Schienen Haltebauteile und den Kunststoffschieber demontieren zu müssen. Die gesamte Einbautiefe erhöht sich auf 126mm.

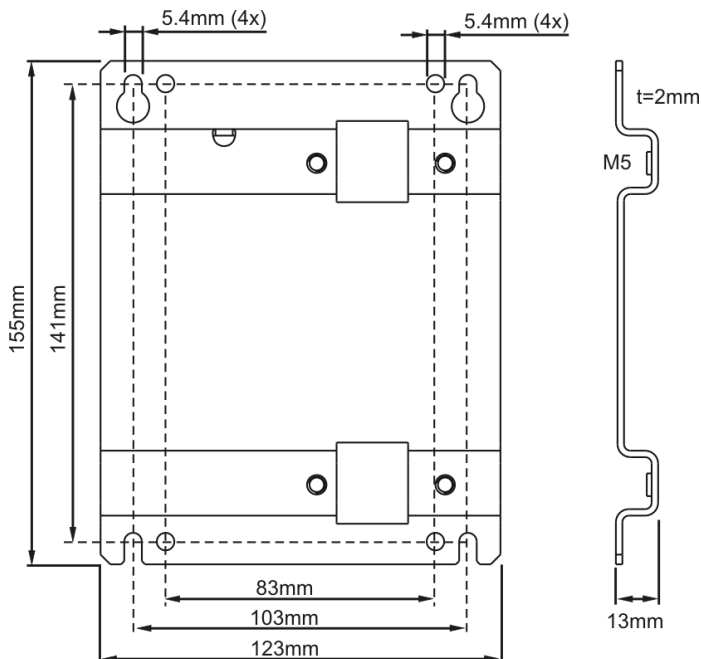

**Mounting Instructions**

- Step 1:** Put the unit backwards on a flat surface and remove the fuse before working on the unit.
- Step 2:** Loosen the captive cover screw.
- Step 3:** Open the battery compartment.
- Step 4:** Remove the battery without disconnecting the connection wires.
- Step 5:** Put the ZM1.UBC10 bracket behind the unit.
- Step 6:** Screw the four screws and the four spring-lock washers, which were delivered with the mounting bracket, into the shown areas. Tightening torque: 3 Nm (27 lb inch)
- Step 7:** Return the battery into the housing, close the battery compartment and insert the fuse again.

**Montageanleitung**

- Schritt 1:** Gerät mit der Unterseite auf eine flache Ebene stellen, Sicherung entfernen
- Schritt 2:** Lockern der Schraube der Batterieabdeckung.
- Schritt 3:** Batteriefach öffnen.
- Schritt 4:** Entfernung der Batterie. Die Anschlussdrähte brauchen nicht abgesteckt zu werden.
- Schritt 5:** Das Gerät auf den Montagewinkel ZM1.UBC10 geben.
- Schritt 6:** Montage mit den mitgelieferten vier Schrauben und vier Sprengringen festschrauben. Anzugsmoment: 3 Nm (27 lb inch)
- Schritt 7:** Batterie wieder ins Gehäuse legen, Batteriefach schließen und Sicherung wieder einstecken.

